


# PROPRIETARY DATA

This document may not be reproduced, disclosed, or otherwise used, in whole or in part, without the written permission of SIRENZA MICRODEVICES



## REVISION HISTORY


REV	DESCRIPTION	ECO	APPR	DATE
A	INITIAL RELEASE	1890	RIVAS	11/13/02

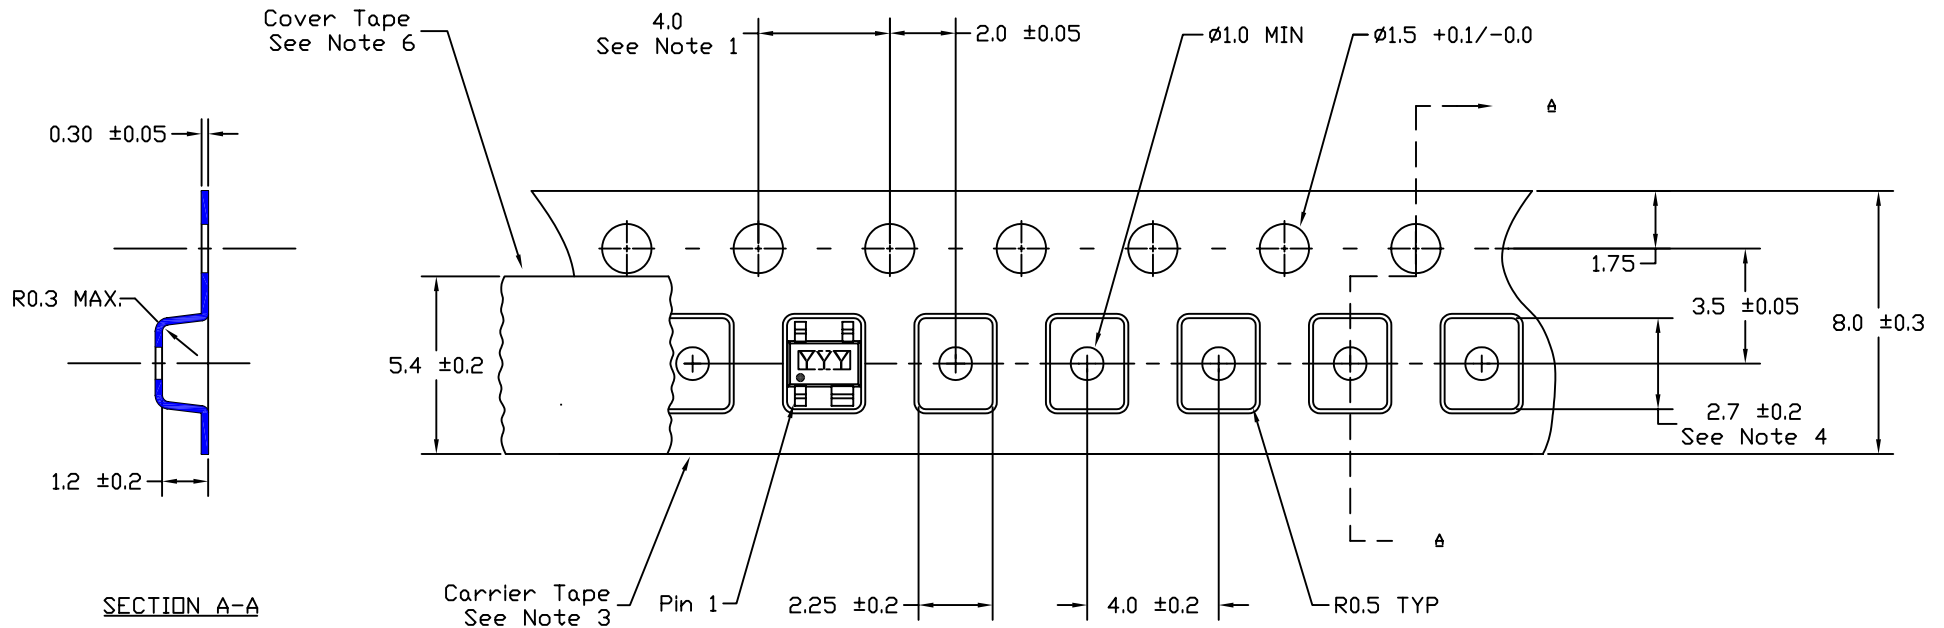

## GENERAL NOTES

- 10 sprocket hole pitch cumulative tolerance
- Camber not to exceed 1mm in 100mm
- Material: Black Conductive Polystyrene
- Measured on a plane 0.3mm above the bottom of the pocket.
- Measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- Material: Antistatic Polyester Film

## THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM [INCHES] PER ANSI Y14.5M-1982.

TOLERANCES ARE:  
DECIMAL ANGLE  
.XX ±0.1[0.25] ±1/2°  
.XXX±.005[0.127]

MATERIAL(S):  
---

FINISH:  
---

WHERE USED

## SCALE:

DO NOT SCALE DRAWING

SIGNATURE	DATE
ORG	
CHK	
TRD	

Dwg Template:  
DDC-102671 (A)



DWG TITLE: Component Tape & reel Packaging

SOT-343

SIZE DWG NO. MPD-102770 REV A

SHEET 1 OF 1